


THE RF VALVES ADVANTAGE

Meeting Global Standards & Best Available Control Technology



Nominal Valve Size & Nominal Bore Size		ASME/ANSI B16.10 AND ANSI/ISA-75-10.02.2008		DIN 3202 F5/F15 DIN PN10	ISO 5752 - Table 6 PN10	ISO PN25
		Dimension "A"				
		mm	Inches	Inches	mm	mm
25	1	5	127	127	127	165
40	1.5	6.5	165	165	165	190
50	2	7	178	178	178	216
65	2.5	7.5	190	190	190	241
80	3	8	203	203	203	283
100	4	9	229	300	229	305
125	5	10	254	325	254	381
150	6	10.5	267	350	267	502
200	8	18	457	400	292	568
250	10	21	533	450	533	533
300	12	24	610	500	610	648
350	14	27	686	550	686	838
400	16	30	762	750	762	914
450	18	34	863	810	863	991
500	20	36	914	880	914	1092
600	24	42	1067	1000	1067	1143

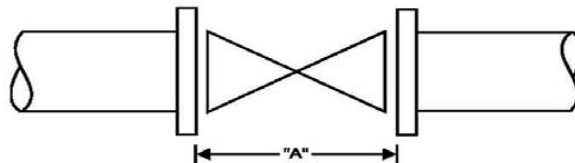

Installed face-to-face dimension "A"



ISO
9001
Certified